

EUREKA 18-6 PUNCTURE SOFT



PRODUCT CODE: E18-6PSOFT




PRODUCT INFORMATION:

- Highest Cut Level Rating EN388 Level F / ANSI Cut Level A8.
- High performance Needle Resistance in palm to ASTM F2878 6N.
- Puncture resistance up to 150N.
- Extremely high abrasion and tear resistance.
- Nitrile coated palm provides good grip in dry and wet/oily environments.
- Reinforced thumb crotch.
- Touchscreen compatible.
- For the most demanding tasks, optimal for security and other tough working conditions.

AVAILABLE IN:

PRODUCT CODE	SIZES	MOQ	CTN QTY
E18-6PSOFT-(SIZE)	7/XS - 12/2XL	1 PAIR	12 PAIRS


CARE INSTRUCTIONS:

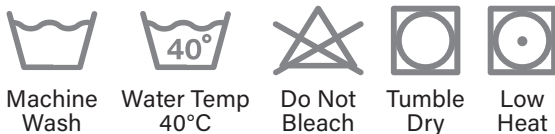

PERFORMANCE DATA:

ANSI Cut Level (2016):	A8
EN 388:	4X43F
EN Abrasion Level:	4
EN Cut Level - Coup Test:	X
EN Tear Level:	4
EN Puncture Level:	3
EN Cut Level - TDM100 Test:	F

STANDARDS:

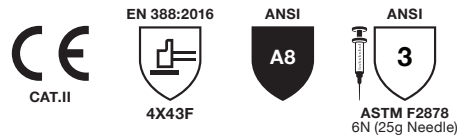

AUSTRALIA
TECH SUPPORT: 1300 275 820
CUSTOMER SERVICE: 1300 770 723

NEW ZEALAND
TECH SUPPORT: 0800 888 778
CUSTOMER SERVICE: 0800 888 778

PIPANZ.COM
EMAIL: INFO@PIPANZ.COM